

S3226E/4726E/4732E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & robust
- Roll-out extension decks for extra reach
- Suitable for indoor and outdoor use
- Ideal for construction & maintenance applications

snorkel
www.snorkellifts.com

SLAB SCISSOR LIFTS


S3226E/4726E/4732E

DIMENSIONS	S3226E	S4726E	S4732E
Max. working height	9.9m	9.9m	11.8m
Max. platform height (A)	7.9m	7.9m	9.8m
Platform size (stowed)	2.14m x 0.71m	2.14m x 1.09m	2.14m x 1.09m
Platform size (extended)	3.05m x 0.71m	3.36m x 1.09m	3.36m x 1.09m
Deck extension length (B)	0.91m	1.21m	1.21m
Overall length (D)	2.3m	2.3m	2.3m
Overall width (C)	0.81m	1.2m	1.2m
Stowed height (E)	2.3m	2.3m	2.39m
Min. height (guardrails folded)	1.86m	1.86m	1.95m
Ground clearance (stowed)	95mm	95mm	95 mm
Ground clearance (elevated)	19mm	19mm	19mm

PERFORMANCE			
Platform capacity	250kg	454kg	350kg
Max. drive height	7.9m	7.9m	9.8m
Max. drive speed (elevated)	3.2km/h	3.2km/h	3.2km/h
Max. drive speed (stowed)	0.6km/h	0.6km/h	0.6km/h
Gradeability	25%	25%	25%
Inside turning radius	0.76m	0.53m	0.53m
Outside turning radius	2.36m	2.41m	2.41m
Tires	0.38m x 0.1m non-marking rubber	0.38m x 0.13m non-marking rubber	0.38m x 0.13m non-marking rubber
Controls	proportional	proportional	proportional
Drive system	2 wheel drive	2 wheel drive	2 wheel drive

POWER	
Power source	4 x 6V 240amp hour batteries
Charger	90-240V 25amp

WEIGHT			
Weight	2,045kg	1,993kg	2,425kg

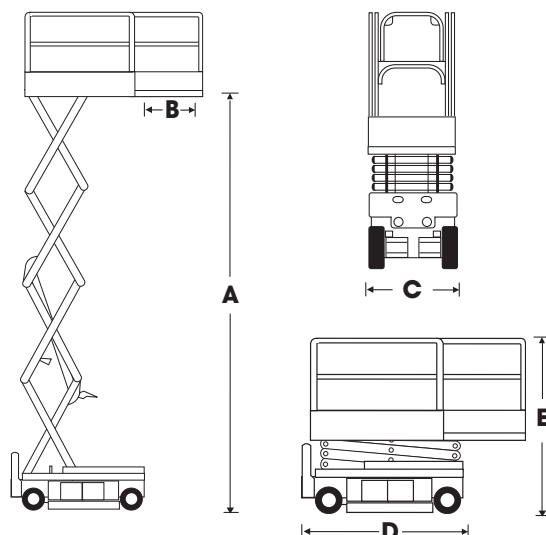


STANDARD FEATURES

- Roll-out deck extension with locking handles
- Non-marking tyres
- Swing-out service trays
- Saloon door entry
- Key switch
- 2 persons + equipment capacity indoors
- 1 person + equipment capacity outdoors
- Proportional controls
- Power line to platform
- Hour meter & onboard diagnostics display
- Dual lanyard attachments points
- Flashing amber light
- CE approved

OPTIONS

- Special paint colours
- Environmental (green) oil

TURNING RADIUS

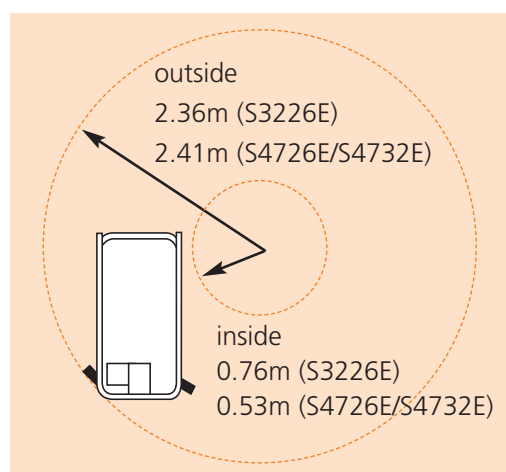

snorkel

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales@snorkellifts.com

www.snorkellifts.com